

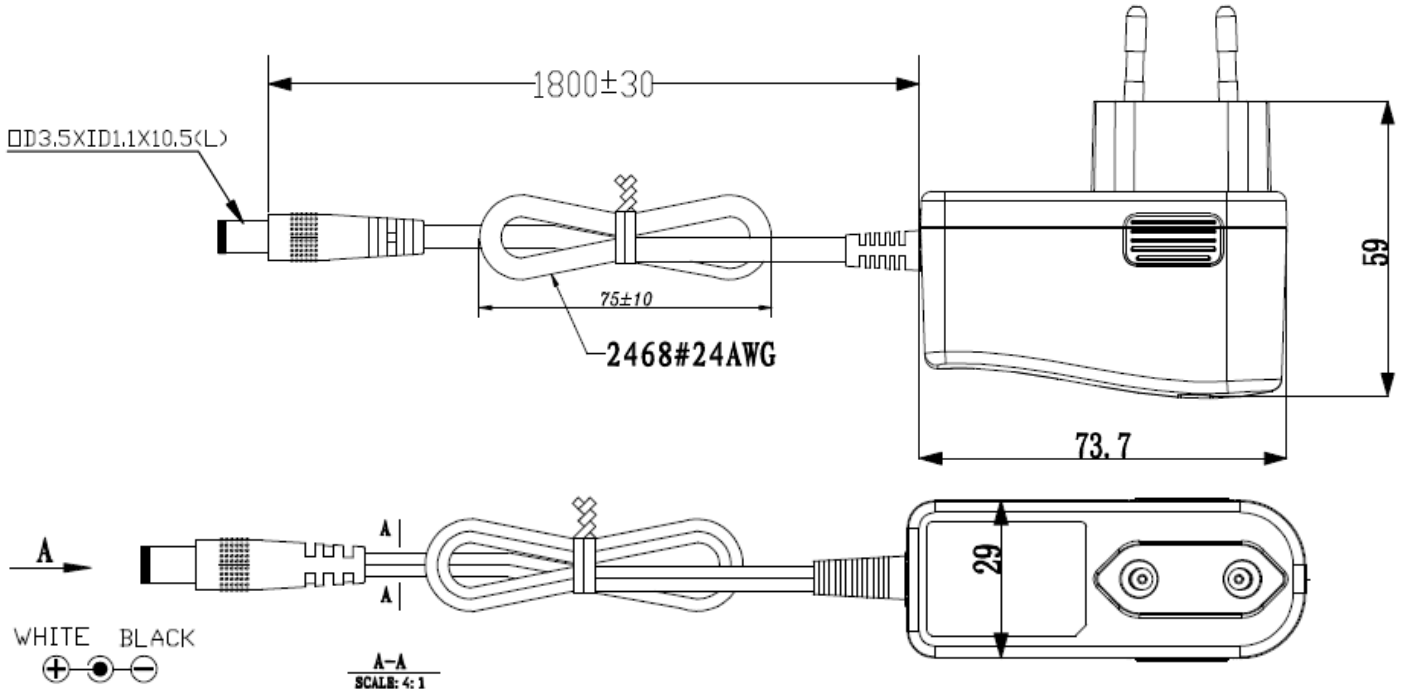
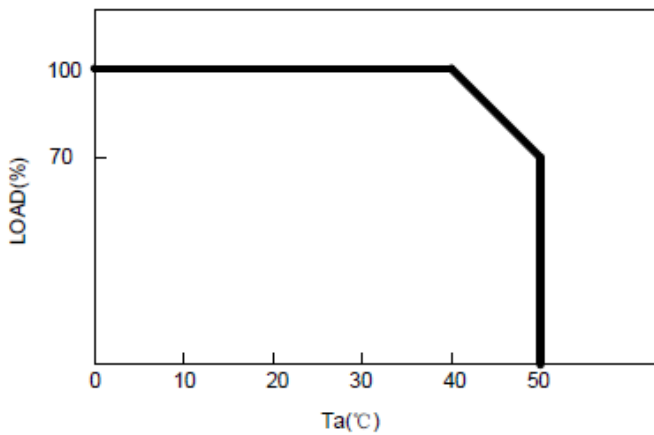

■ Features :

- Universal AC input / Full range
- No load power consumption < 0.4W
- Class II power (without earth pin)
- Constant current and voltage (CC, CV mode)
- 2 color LED indicates charging status
- Protections: Short circuit / Over load / Over voltage
- Fully enclosed plastic case
- Approvals: CE / CB
- 2 year warranty

CE CB
SPECIFICATION

ORDER NO.		HR05NE042-100	HR05NE084-070	HR05NE126-045	HR05NE168-035	HR05NE210-028	HR05NEABC-XYZ
OUTPUT	DC VOLTAGE	4.2V	8.4V	12.6V	16.8V	21V	3~24V
	RATED CURRENT	1.0A	0.7A	0.45A	0.35A	0.28A	0~1.0A
	CURRENT RANGE	0~1.0A	0~0.7A	0~0.45A	0~0.35A	0~0.28A	0~1.0A
	RATED POWER	4.2W	5.88W	5.67W	5.88W	5.88W	6WMax
	RIPPLE & NOISE (max.)	200mVp-p	200mVp-p	200mVp-p	240mVp-p	240mVp-p	240mVp-p
	VOLTAGE ADJ. RANGE	2.7~4.2V	5.4~8.4V	8.1~12.6V	10.8~16.8V	13.5~21V	3~24V
		Fixed					
	VOLTAGE TOLERANCE	±5.0%	±5.0%	±5.0%	±5.0%	±3.0%	
	LINE REGULATION	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	
	LED INDICATOR	Red: charging Green: finish/standby					
SETUP, RISE, HOLD UP TIME	3000ms, 50ms, 16ms at full load						
INPUT	VOLTAGE RANGE	90 ~ 264VAC 135 ~ 370VDC					
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	60%	60%	65%	65%	66%	
	AC CURRENT						
	INRUSH CURRENT (Typ.)	50A/230VAC					
	LEAKAGE CURRENT (max.)	0.25mA / 240VAC					
PROTECTION	OVER LOAD	90 ~ 110% Constant current mode Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	OVER VOLTAGE	135 ~ 180% rated output voltage Protection type : Clamp by PWM IC					
ENVIRONMENT	WORKING TEMP.	0 ~ + 40℃ (Refer to output load derating curve)					
	WORKING HUMIDITY	20% ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-20 ~ +85℃ , 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03% /℃ (0 ~ 50℃)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
SAFETY & EMC (Note.8)	SAFETY STANDARDS	UL60950-1, CSA 22.2, EN60950-1 Approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC					
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25℃ / 70% RH					
	EMICONDUCTION& RIATION	Compliance to EN55022 class B, FCC PART 15 class B					
	HARMONIC CURRENT	Compliance to EN61000-3-2,3					
EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,11, Light industry level, criteria A						
OTHERS	MTBF	50000hrs min. MIL-HDBK-217F (25℃)					
	DIMENSION	73.7*29*59mm (L*W*H)					

	PACKING (Typ.)	80g ;
CONNECTOR	PLUG	Standard type : 1.1Φ* 3.5Φ* 10.5mm, tuning fork type center positive available ; Other type available per customer request
	CABLE	Standard type 24Awg UL2468 ,Other type available per customer request

Mechanical Specification

Derating Curve

Static Characteristics
